


# Display WW-30, WW-30T



Outer dimensions:  
 Width: 72 mm, height 36 mm,  
 depth: 96 mm  
 Dimensions of panel cut-out  
 32,5 mm x 67 mm




Remote controller. RC-01

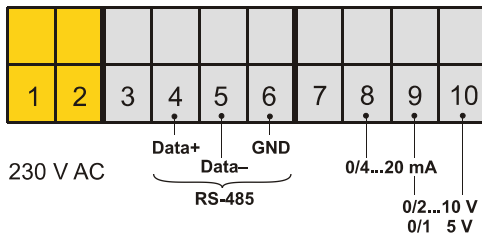

WW-30: version for current and voltage input

...

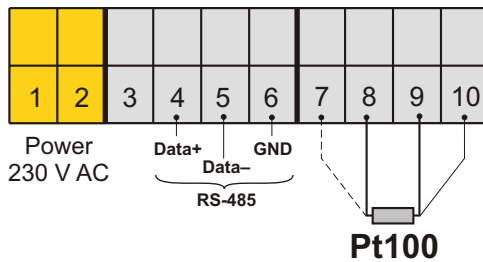

WW-30T: resistant input Pt100

- ✓ 4..20mA or 0..20mA current input (WW-30)
- ✓ 0..5V, 1..5V, 0..10V, 2..10V Voltage input (WW-30)
- ✓ Pt100, Resistant input (WW-30T)
- ✓ Power supply 230 V AC ± 10%

### Application and function

WW-30 and WW-30T displays are applicable to cooperation with the transmitters having a standard current, voltage or resistant output signal. The WW-30, WW-30T has a configurable display range from -999 to 9999.

WW-30, WW-30T can be programmed only by remote controller RC-01. User can to depute Aplisens company to program the following parameters.

- Type of input signal 4..20mA or 0..20mA  
0..5V, 1..5V, 0..10V, 2..10V  
Pt100
- Measured value display range and decimal point position.
- Password restricting access to the programming menu.
- Display filtering level.

The RC-01 remote controller doesn't belong to display equipment. RC-01 is available on request.

### Technical data

<b>Input signal</b>	4..20mA, 0..20mA 0..5V, 1..5V, 0..10V, 2..10V Pt100
<b>Display range</b>	-999...9999
<b>Display error</b>	±0,25% ± 1 digit
<b>Display</b>	LED 4x13mm( red)
<b>Power supply</b>	230V AC ± 10%/1,5VA Special version: 10 – 30V DC
<b>Operating temperature</b>	0...50°C (-20...50C option)
<b>Storage temperature</b>	- 10...70°C
<b>Casing</b>	panel type, IP40 (from the front), IP20 (from the terminal)

### Ordering procedure

Remote : remote RC-01

