


ADF

PPM300, 90 – 120 A Active Dynamic Filter Power Processor Modules



- High Performance and Reliability
- Narrow and tall design saves space
- Easy to integrate
- Simple installation
- Insensitive to Network Conditions
- Suitable for:
 - Harmonic Elimination
 - Total Power Factor Correction
 - Active Load Balancing
 - Dynamic VAR compensation
- Non-overloadable
- Available in 208 – 480 V, 480 – 690 V (IEC)
- Available in 208 – 480 V, 480 – 600 V (UL)



ADF
Power
Tuning


Technical Specifications

Model	PPM300v2-3-A-120/480 PPM300v2-3-A-110/480-UL	PPM300v2-3-A-90/690 PPM300v2-3-A-90/600-UL
Rated current	120 A _{RMS} 110 A _{RMS} (UL)	90 A _{RMS}
System voltage	480 V (208 – 480 V)	690 V (480 – 690 V) 600 V (480 – 600 V)
Nominal frequency	50/60 Hz ± 2 %	
Number of phases	3 phase 3 wire	
Connection type	3 phase without neutral (TN, TT, IT*)	
Harmonic current compensated	individual compensation up to 49 th order	
Rate of harmonic reduction	better than 98 %	
Current compensation of cos φ	up to 1.0	
Expandability	Up to 3 modules can be controlled by one SCC2-P3 Up to 6 modules can be controlled by one SCC2-P6 Cluster of several SCC2 units can work in parallel for up to 90 PPM modules	
Switching frequency	7.2 kHz	
Power dissipation	< 2725 W	< 2969 W
Maximum air flow requirement	600 m ³ /h	
Noise level	< 70 dB(A)	
Environment	0 to 95 % RH non-condensing, max altitude 1000 m without derating	
Operating temperature	0 to 50 °C, up to 40 °C without derating	
Dimensions	230 x 1400 x 470 mm (W x H x D)	
Weight	133 kg	138 kg
Enclosure color	RAL 7035 (light grey) RAL 5017 (traffic blue)	
Protection class	IP20 according to IEC 529	
Electromagnetic compatibility	EN55011, Class B	
Certificates	CE, UL508/GSA22.2 (UL version only)	

* Option

The ADF PPM300 line allows OEM's and system integrators to provide active filtering within their application. The PPM300 line of inverter modules are suitable for mounting in MCCs, switchgear rooms, switchgear equipment, power houses and in dedicated standalone cabinets. ADF PPM300 modules can solve a wide range of power quality problems, including harmonics, reactive power (capacitive and inductive), as well as flicker and load unbalance.

Dimensions (mm)

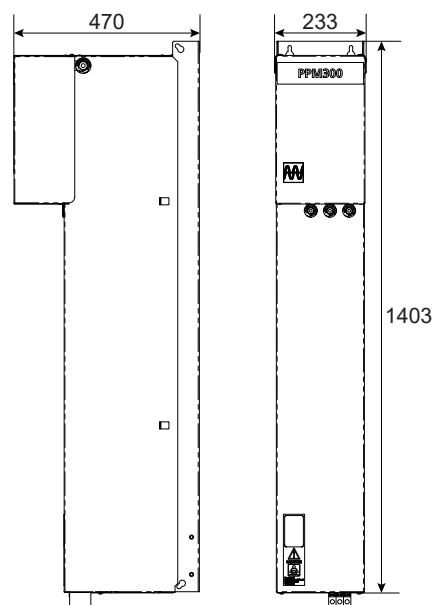

Comsys AB, Fältspatvägen 4, SE-224 78 Lund, Sweden
Tel +46 10 209 6800, Fax +46 10 209 6805
info@comsys.se www.comsys.se

Partner:

zeben.
sistemas eletrónicos

Zeben – Sistemas Electrónicos Lda.
Trav. de Baixo n°5
4935-571 Castelo do Neiva
Viana do Castelo (Portugal)
Tel: +351 253 818 850
Fax: +351 253 818 851
info@zeben.pt
www.zeben.pt