

F808 RA

UNI12845

Box remotazione allarmi

Antincendio

Descrizione

Il box di remotazione Allarmi F808RA provvede ad indicare in modo luminoso ed acustico gli eventuali allarmi della elettropompa o della motopompa, in conformità a quanto previsto dalla normativa UNI EN12845 alla APPENDICE I, punti 10.8.6.1 e 10.9.11. Le sue piccole dimensioni 118x158x75, l'elegante grafica e il grado di protezione IP55 ne permette il montaggio in qualsiasi ambiente, interno o esterno.

Il box è unico per elettropompa o motopompa e ogni allarme può essere descritto in qualsiasi lingua. Vengono infatti fornite di serie, assieme al box, delle strip con i vari allarmi per elettropompa e motopompa descritti in lingua: IT; GB; DE; ES; FR; UK; PT. Ogni strip potrà poi essere infilata nella fessura ricavata in prossimità dei 5 led che si accenderanno in caso di allarme.



Composizione:


- 1- box in materiale plastico dimensioni (H-118 ; L-158 ; P-75) provvisto di un pressacavo per ingresso cavi
- 1-pulsante di tacitazione sirena
- 1-pulsante di test led segnalazione allarmi
- 1-allarme sonoro IP55 75dB
- 5-led di segnalazione
- 1-morsettiera di collegamento

Caratteristiche costruttive:

- Grado di protezione IP65
- Tensione di alimentazione 12/24Vdc
- Segnale acustico 75dB

CODICE DI ORDINAZIONE:

- F808RA

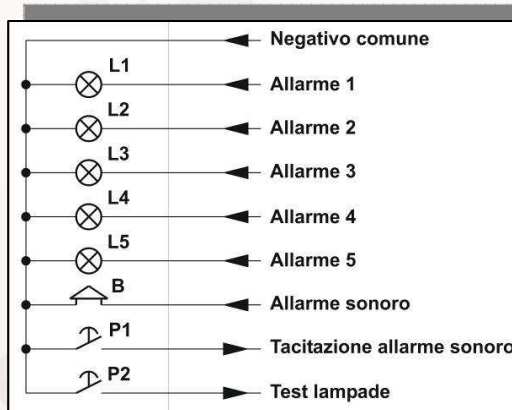

F808 RA

UNI12845

Alarms report box

Firefight

Description

The F808RA Remote Alarms box is very useful to keep monitoring also with acoustic signalization, the electrical pump or motorpump possible alarms, in accordance with the UNI EN12845 norm, APPENDIX I, points 10.8.6.1 e 10.9.11.

Thanks to its small dimensions 118x158x75, the polished graphics and the IP55 protection degree, it is possible to assemble them in any environment, indoor or outdoor.

The box is the same for both electropump and motorpump, provided with some strips with different alarms that could be described with a language of choice (IT; GB; DE; ES; FR; UK; PT). Then each strip can be put into the slit, near the correspondent led which turns on when its alarm occurs.



Composition:

- ▶ PVC cabinet dimensions (H-118 ; L-158; P-75) provided with a cable entry clamp
- ▶ 1-silencer button for acoustic alarm
- ▶ 1-alarm lamps test button
- ▶ 1-acoustic alarm buzzer IP55 75dB
- ▶ 5-signaling lamps
- ▶ 1-terminal board connection

Technical data:

- ▶ Protection level IP65
- ▶ Supply voltage 12/24Vdc
- ▶ Acoustic signal 75dB

Order codes:

- F808RA

